

MMAtwo - This project has received funding from the European Union's Horizon 2020 research and innovation program under grant agreement No 820687

The MMAtwo project results presented reflect only the author's view. The Commission is not responsible for any use that may be made of the information it contains.

MMAtwo RESTRICTED - Under Consortium Agreement, Confidential until Oct 1st 2026

MMAtwo

SECOND GENERATION METHYLMETHACRYLATE

Deliverable

WP7 – Communication, Dissemination and Academic Outreach

D7.4 Second project newsletter

Project Information

Grant Agreement n°	820687
Dates	1st October 2018 – 30th September 2022

PROPRIETARY RIGHTS STATEMENT

This document contains information, which is proprietary to the MMATWO Consortium. Neither this document nor the information contained herein shall be used, duplicated or communicated by any means to any third party, in whole or in parts, except with prior written consent of the MMATWO consortium.

Document Status

Document Information

Deliverable name	MMAtwo_D7.4_ 29112021_VF
Responsible beneficiary	Maud Bossard / Benkei
Contributing beneficiaries	Maud Bossard / Benkei
Contractual delivery date	M36 - 30/09/2021
Actual delivery date	M38 - 29/11/2021
Dissemination level	Public Confidential

Document approval

Name	Position in project	Organisation	Date	Visa
Dagmar D'hooge	WP Leader	UGENT	29/11/2021	OK
Maud Bossard	Management Support Team	BENKEI	29/11/2021	OK
Simon van der Heijden	Coordinator	HEATHLAND	29/11/2021	OK

Document history

Version	Date	Modifications	Authors
V1	26/11/2021	First version	M. Bossard / Benkei
VF	29/11/2021	Finalisation	S van der Heijden / Heathland

Table of content

Document Status	2
Table of content	3
Executive Summary	4
1 Description of the deliverable	4
2 Deviation	5
3 Conclusion.....	5
Deliverable report	6
1 Project newsletter #3 – January 2021.....	6
2 Project newsletter #4 – November 2021	6

Executive Summary

1 Description of the deliverable

The deliverable presents the project newsletters that have been published in January 2021 (Newsletter #3) and in November 2021 (Newsletter #4).

The content was prepared with all partners, during the 24M General Assembly meeting and the 36M General Assembly meeting respectively.

The newsletters have been sent to:

- all project partners so they can share it with their contacts and on their entity websites;
- people that registered on the website wishing to be informed about the project results (31 persons);
- the members of the MMAtwo Advisory Board.

They have also been relayed via the **MMAtwo website** and the **MMAtwo LinkedIn page** (see Figure 1 and Figure 2).

They can be downloaded at the following link:

<https://www.mmatwo.eu/mmatwo-newsroom/mmatwo-newsletter/>

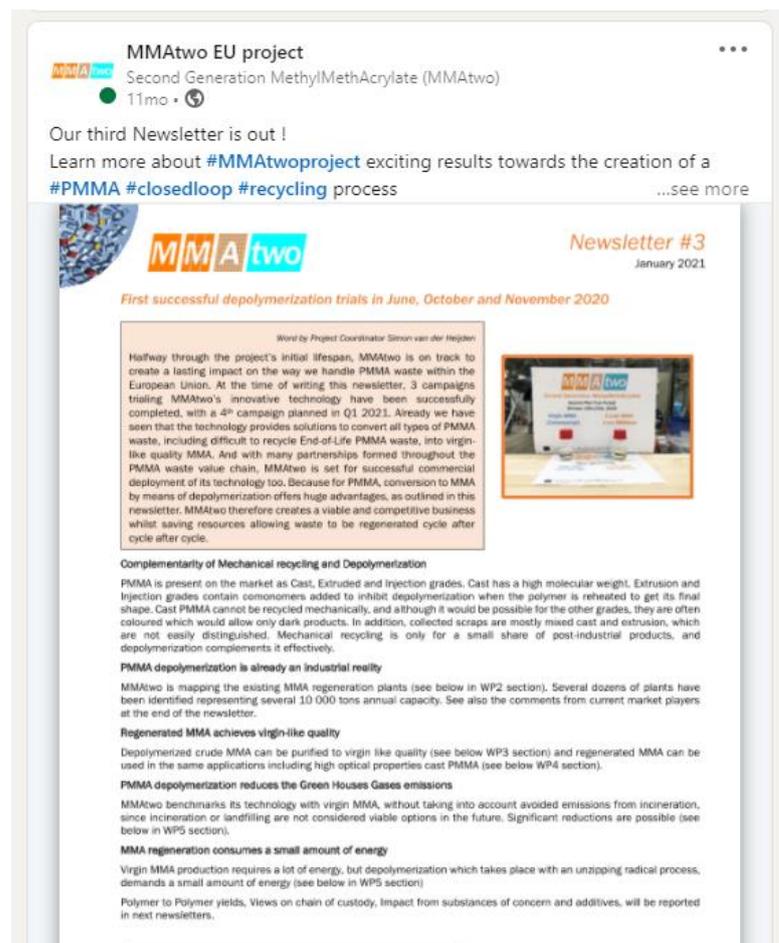


Figure 1 : MMAtwo LinkedIn post regarding the Newsletter #3

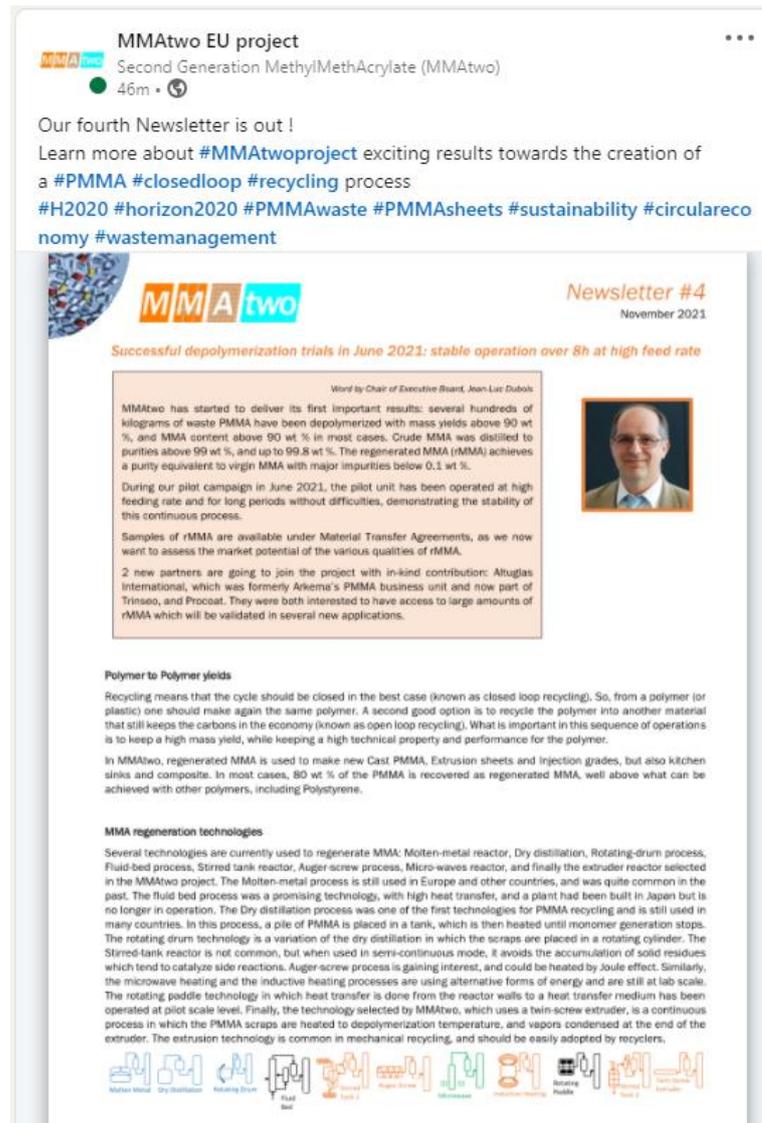


Figure 2 : MMAtwo LinkedIn post regarding the Newsletter #4

Significant increase of registration on the project website has been observed, an efficient way for external partners to manifest their interest to be a MMAtwo Advisory Board member or to be part of the Stakeholder group member: **68 requests** have been registered since the beginning of the project.

2 Deviation

With an initial delivery date at M36, this Deliverable was delayed by two months to include the Newsletter #4.

3 Conclusion

Both newsletters have been a real success and very much appreciated by the Advisory Board members and the other stakeholders. Additional newsletters will be produced during the project lifetime, especially when important technical milestones are achieved.

Deliverable report

1 *Project newsletter #3 – January 2021*

Attached to the document

2 *Project newsletter #4 – November 2021*

Attached to the document

First successful depolymerization trials in June, October and November 2020

Word by Project Coordinator Simon van der Heijden

Halfway through the project’s initial lifespan, MMAtwo is on track to create a lasting impact on the way we handle PMMA waste within the European Union. At the time of writing this newsletter, 3 campaigns trialing MMAtwo’s innovative technology have been successfully completed, with a 4th campaign planned in Q1 2021. Already we have seen that the technology provides solutions to convert all types of PMMA waste, including difficult to recycle End-of-Life PMMA waste, into virgin-like quality MMA. And with many partnerships formed throughout the PMMA waste value chain, MMAtwo is set for successful commercial deployment of its technology too. Because for PMMA, conversion to MMA by means of depolymerization offers huge advantages, as outlined in this newsletter. MMAtwo therefore creates a viable and competitive business whilst saving resources allowing waste to be regenerated cycle after cycle after cycle.



Complementarity of Mechanical recycling and Depolymerization

PMMA is present on the market as Cast, Extruded and Injection grades. Cast has a high molecular weight. Extrusion and Injection grades contain comonomers added to inhibit depolymerization when the polymer is reheated to get its final shape. Cast PMMA cannot be recycled mechanically, and although it would be possible for the other grades, they are often coloured which would allow only dark products. In addition, collected scraps are mostly mixed cast and extrusion, which are not easily distinguished. Mechanical recycling is only for a small share of post-industrial products, and depolymerization complements it effectively.

PMMA depolymerization is already an industrial reality

MMAtwo is mapping the existing MMA regeneration plants (see below in WP2 section). Several dozens of plants have been identified representing several 10 000 tons annual capacity. See also the comments from current market players at the end of the newsletter.

Regenerated MMA achieves virgin-like quality

Depolymerized crude MMA can be purified to virgin like quality (see below WP3 section) and regenerated MMA can be used in the same applications including high optical properties cast PMMA (see below WP4 section).

PMMA depolymerization reduces the Green Houses Gases emissions

MMAtwo benchmarks its technology with virgin MMA, without taking into account avoided emissions from incineration, since incineration or landfilling are not considered viable options in the future. Significant reductions are possible (see below in WP5 section).

MMA regeneration consumes a small amount of energy

Virgin MMA production requires a lot of energy, but depolymerization which takes place with an unzipping radical process, demands a small amount of energy (see below in WP5 section)

Polymer to Polymer yields, Views on chain of custody, Impact from substances of concern and additives, will be reported in next newsletters.

MMAtwo 3 major objectives:

- Construct a **new PMMA depolymerization value chain in Europe**, covering the whole value chain of the PMMA lifecycle with both production waste and end of life waste
- Avoid down-cycling through **reactive regeneration** (depolymerization)
- Develop an **innovative metal-free technology** enabling depolymerization of lower quality waste.





MMAtwo is divided into 7 Topics (so called Work Packages)

- WP1:** Collection of scraps and pretreatment,
- WP2:** Depolymerization,
- WP3:** Purification,
- WP4:** Exploitation, end-users tests, business analysis,
- WP5:** Techno-economic and environmental assessment,
- WP6:** Project management,
- WP7:** Communication, dissemination and academic outreach.

Main results achieved since May 2020


WP1 - Ecologic, assisted by **Heathland**, performed a countrywide research in France to map sources of End-of-life PMMA waste originating from WEEE. As PMMA is used in many Flat Panels Displays (FPD) as a light guide panel, the amount of PMMA waste from WEEE is steadily increasing. The research identified the main sources of PMMA from WEEE, the ways to recover PMMA from WEEE cost-effectively and a seamless process to convert this type of PMMA into either rPMMA or rMMA.

Through **MMAtwo's unique pretreatment technology** the PMMA was prepared for optimal recovery in WP2, resulting in near-virgin quality raw material. The research was extrapolated from France to Europe, in collaboration with WEEE collection centers to map total available feedstocks, now and in years to come.

Further progress was booked on automatic separation of PMMA and PVC by **Heathland**, using a specialized process to reach suitable feedstock for depolymerization. Research was done on waste streams from **Arkema** and **Delta Glass**, where analysis was performed by **Certech** and **Comet**.

A broad spectra of different PMMA waste types was pretreated into ready feedstock for conversion into crude rMMA.

Identified MMAtwo waste by resulting pretreated feedstock

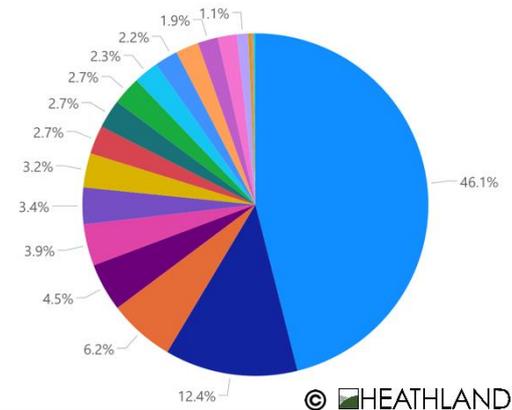

© HEATHLAND



© HEATHLAND



© HEATHLAND EcoLogic

WP2 - PMMA depolymerization has moved from the laboratory to the pilot scale, with 3 test periods in June, October and November 2020. During these tests, in which partners **Arkema**, **Heathland**, **Japan Steel Works Europe** and **PDC** contributed, several different types of PMMA (Post-Industrial and End-of-Life) materials have been processed. The unit operated better at above design capacity, and the limitation was the storage capacity. The pilot was operated above 1000 t annual capacity for several hours, producing high quality crude MMA.




During the November 2020 tests, out of a dozen of materials, End of Life WEEE waste was processed (left sample and material on the picture) and clear crude MMA was produced. A first composite material was also depolymerized (right sample and material) which will be also further purified in the coming month.




MMAtwo continues the mapping of the PMMA depolymerization plants in the world, together with their current capacities and technologies (done by **Heathland** and **Arkema**). The mapping is a continuous exercise aiming to show to the stakeholders (producers, customers, public authorities...) that PMMA can be and is already depolymerized in significant amount, and that more can be done with our new technology with a potential of fast adoption.

People aware of existing facilities are encouraged to report to Jean-Luc Dubois (jean-luc.dubois@arkema.com) (**Arkema**) who is updating the mapping on regular basis.

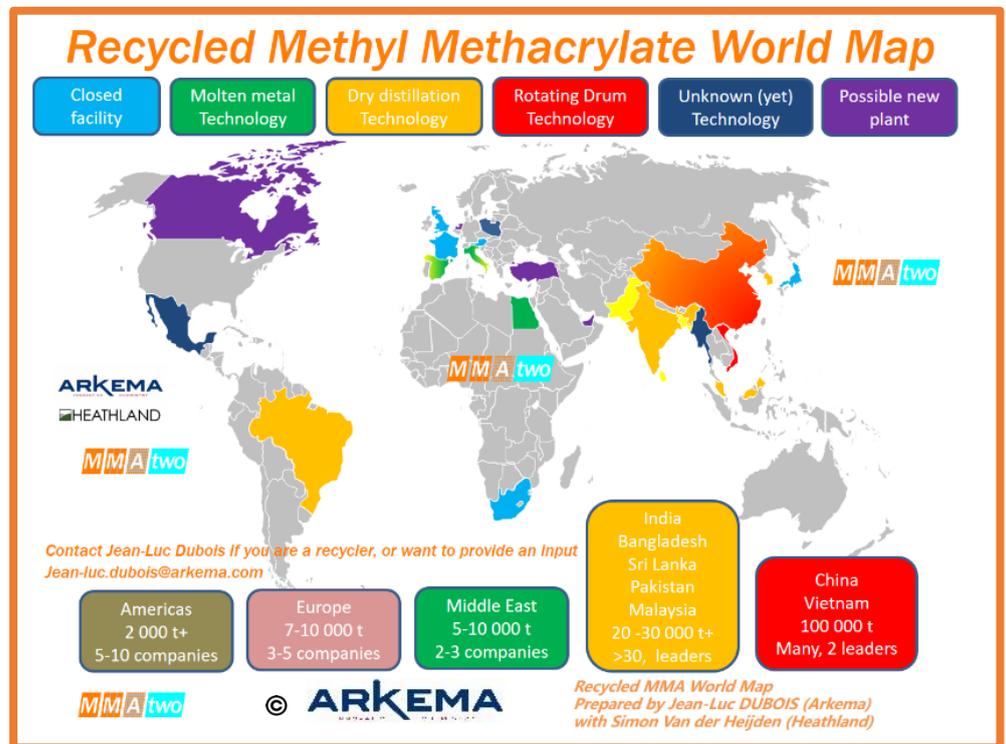

WP3 - **Speichim** moved the purification, from laboratory scale to the pilot scale, on the crude MMA obtained from the first depolymerization trial in **Japan Steel Works Europe**. The same encouraging results were obtained at both scales (laboratory and pilot). The purity of the recovered MMA was very high: 99.8%. The recovered MMA was successfully tested.

Analysis certificate recovered Methyl Methacrylate	
Items	Figures
MMA purity (by GC)	99.8 %
Acidity as Methacrylic acid	< 5 ppm
Water content	400 ppm
Colour	≤ 10 APHA
Methyl Acrylate + Ethyl Acrylate	0.12 %
Methyl Isobutyrate	0.04 %
Density at 20 °C	0.943
Stabilizers: Topanol A or MEHQ	as requested

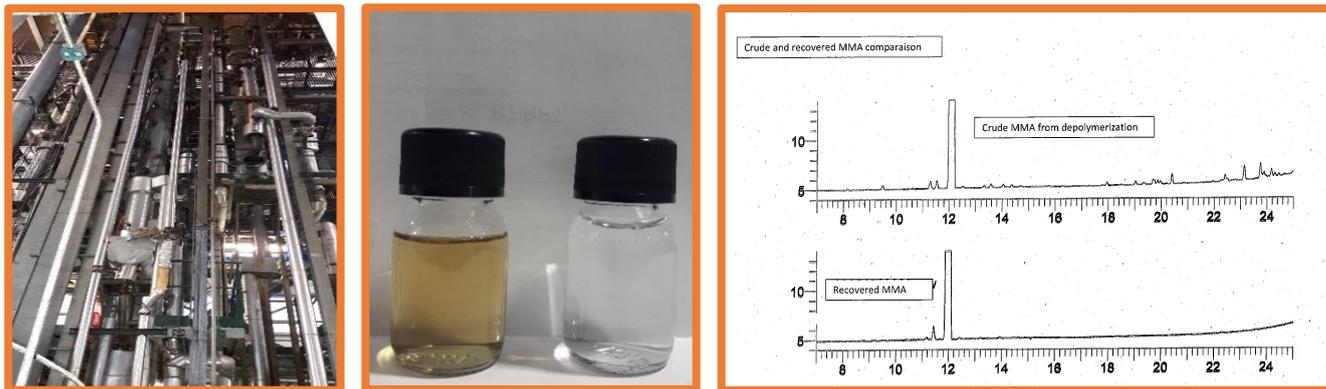

Purification pilot plant. Left: Crude MMA, Right: Regenerated MMA. Crude and regenerated MMA.



WP4 - The purified rMMA obtained during the first depolymerization pilot trials mentioned above was used in production by **Delta Glass** in order to successfully manufacture standard sheets with dimensions 1600 x 2600 x 3 mm³ from which a first caravan window was produced (see pictures).



Left: industrial cast sheet made from pilot trial rMMA, right: caravan window obtained from the same cast material.




Evaluation of various rMMAs from lab scale depolymerization as well as the purified pilot plant rMMA has been finalized and validated for structural composite applications by **Arkema** and for kitchen sink applications by **Delta Plados** (see picture). **Certech** showed that the main odorous intensities of structural composite materials originate from residual monomers and comonomers, recombination products and most likely degradation products. This is equivalent to what is observed with virgin material.

Left: preparation of fully recycled syrup (mixture of pilot plant rMMA and post-industrial rPMMA scrap), center and right: first prototype sinks (“Avena” and “Deep Black” compositions) obtained with said syrup.




Heathland received further interest for the project from several third parties from industry following the MMAtwo webinar organized by **UGent** on September 15, 2020.

WP5 - Quantis has refined LCA results for benchmark technologies, taking into account the different routes for virgin MMA production and including reference datasets from recognized environmental databases.

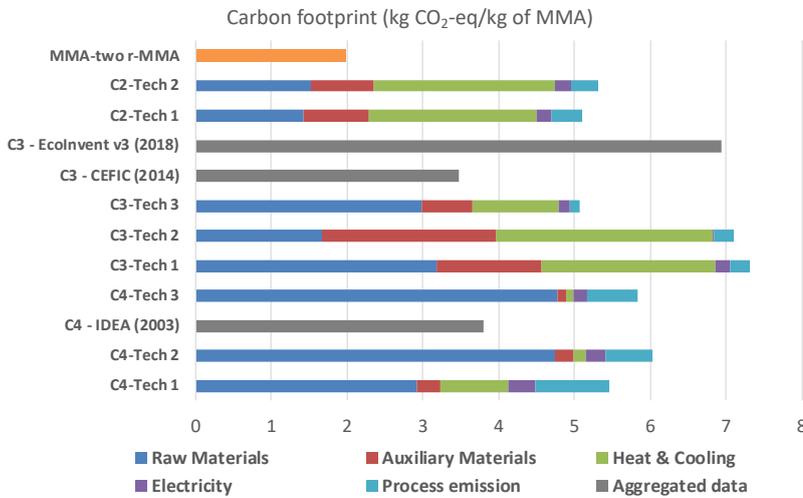

- Cx routes were developed on mass end energy balance (with no energy optimization) - C2: Ethylene-based, C3: Acetone-based, C4: isobutylene/t-butanol-based routes
- EcolInvent and CEFIC datasets represent European average production from real plants
- IDEA dataset represents Japanese average production from real plants (C4).
- Virgin MMA Carbon footprint ranges from 3.5-7 kg CO₂-eq/kg MMA
- Initial results for MMAtwo technology show an impact reduction -44% to -73% depending on the virgin technology considered

Based on process design and simulation performed by PDC, MMAtwo partners will soon be able to test the sensitivity of rMMA environmental footprint depending on feedstock purity and operating conditions. Here is an example of mass and energy balance of rMMA production from pure PMMA scraps without heat integration.

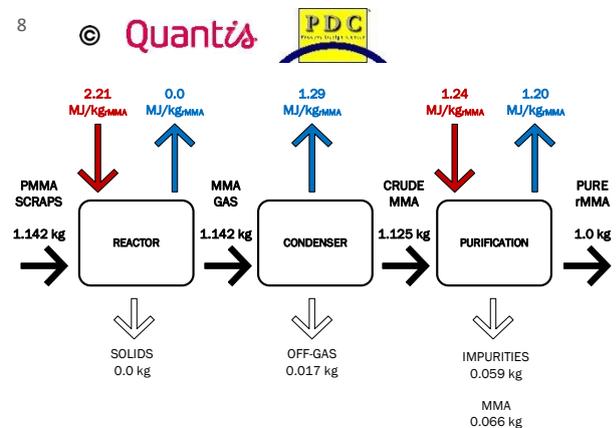

MMAtwo Main events



Are you interested to contribute to the MMAtwo project or do you simply want to stay informed about all our news?

Please let us know by completing the following form

www.mmatwo.eu/contact/

MEET US THERE

- [9th Conference on CO₂-based Fuels and Chemicals](#), 23 & 24 March 2021, Cologne, Germany
- [Renewable Materials Conference](#), 18-20 May 2021, Cologne, Germany,
- [AMI Plastics Recycling Technology](#), 20 - 21 October 2021, Vienna, Austria
- [11th ICIS World Phenol-Acetone Conference](#), Date and place to be confirmed

Thank you for participating to our workshop on polymer recycling last September !

Slides are available on our project website in the [newsroom section](#)



Words from our stakeholders



A European study, dated about one year ago, found that about 57 billion euros are lost every year due to lack of efficient recycling or simply recycling. This illustrates the importance of recycling, in terms of economy and environment. The recycling regeneration of MMA is a definitively good move towards circular economy for Europe

PMMA recycling project is an important pioneering project clearly showing, like some other projects that old technics can be dramatically improved, allowing recycling and circular economy to become a technical and economic reality.

Philippe Salemis, Methacrylate Sector Group Manager, CEFIC, Brussels



'Today the actual technology and plants allow to reprocess high quality MMA, from PMMA waste of different colors, as well as from cast than extruded sheets, which cannot be mechanically recycled, realizing a real "closed loop process".'

The goal of reprocessing wastes to a very high quality substance (MMA) is a reality, with a reduction of CO2 emissions by 70 % with respect to virgin MMA.

The new process in MMAtwo will allow to reprocess very complex PMMA wastes, unlikely to be reprocessed with the actual technologies, to highly pure MMA.

Antonella Annunziata, Madreperla CEO

The chemical recovery of any "plastic" is generally not understood, most believe that you can only blend as a solid as in the case of PVC or rubber compounds or only recover a very low purity monomer only suitable for a fuel source. PMMA is one of the very few polymers that can be converted / de-polymerised back to the original monomer and at very high purity allowing you to use the distilled DMMA in place of virgin MMA. It can also be de-polymerised again from the solid sheet form without the DMMA losing any of its properties which is unique to the chemical recovery process.

The PMMA recovery plants use relatively little water or other utilities during the conversion process in relation to the vast amount of water and energy needed to produce virgin MMA. There is obviously a waste / by-product from any chemical plant that must be disposed of in the correct manner but this represents a very small percentage of the overall recovery and benefit that is gained. The major drawback from any recovery unit is the collection, sorting and preparation of the "scrap" feedstock. Certainly the work MMAtwo has done to date in this regard is very encouraging.

Bob Fowler, PMMA recycling consultant

Successful depolymerization trials in June 2021: stable operation over 8h at high feed rate

Word by Chair of Executive Board, Jean-Luc Dubois

MMAtwo has started to deliver its first important results: several hundreds of kilograms of waste PMMA have been depolymerized with mass yields above 90 wt %, and MMA content above 90 wt % in most cases. Crude MMA was distilled to purities above 99 wt %, and up to 99.8 wt %. The regenerated MMA (rMMA) achieves a purity equivalent to virgin MMA with major impurities below 0.1 wt %.

During our pilot campaign in June 2021, the pilot unit has been operated at high feeding rate and for long periods without difficulties, demonstrating the stability of this continuous process.

Samples of rMMA are available under Material Transfer Agreements, as we now want to assess the market potential of the various qualities of rMMA.

2 new partners are going to join the project with in-kind contribution: Altuglas International, which was formerly Arkema's PMMA business unit and now part of Trinseo, and Procoat. They were both interested to have access to large amounts of rMMA which will be validated in several new applications.



Polymer to Polymer yields

Recycling means that the cycle should be closed in the best case (known as closed loop recycling). So, from a polymer (or plastic) one should make again the same polymer. A second good option is to recycle the polymer into another material that still keeps the carbons in the economy (known as open loop recycling). What is important in this sequence of operations is to keep a high mass yield, while keeping a high technical property and performance for the polymer.

In MMAtwo, regenerated MMA is used to make new Cast PMMA, Extrusion sheets and Injection grades, but also kitchen sinks and composite. In most cases, 80 wt % of the PMMA is recovered as regenerated MMA, well above what can be achieved with other polymers, including Polystyrene.


MMA regeneration technologies

Several technologies are currently used to regenerate MMA: Molten-metal reactor, Dry distillation, Rotating-drum process, Fluid-bed process, Stirred tank reactor, Auger-screw process, Micro-waves reactor, and finally the extruder reactor selected in the MMAtwo project. The Molten-metal process is still used in Europe and other countries, and was quite common in the past. The fluid bed process was a promising technology, with high heat transfer, and a plant had been built in Japan but is no longer in operation. The Dry distillation process was one of the first technologies for PMMA recycling and is still used in many countries. In this process, a pile of PMMA is placed in a tank, which is then heated until monomer generation stops. The rotating drum technology is a variation of the dry distillation in which the scraps are placed in a rotating cylinder. The Stirred-tank reactor is not common, but when used in semi-continuous mode, it avoids the accumulation of solid residues which tend to catalyze side reactions. Auger-screw process is gaining interest, and could be heated by Joule effect. Similarly, the microwave heating and the inductive heating processes are using alternative forms of energy and are still at lab scale. The rotating paddle technology in which heat transfer is done from the reactor walls to a heat transfer medium has been operated at pilot scale level. Finally, the technology selected by MMAtwo, which uses a twin-screw extruder, is a continuous process in which the PMMA scraps are heated to depolymerization temperature, and vapors condensed at the end of the extruder. The extrusion technology is common in mechanical recycling, and should be easily adopted by recyclers.



Views on chain of custody. <https://www.iso.org/obp/ui/fr/#iso:std:iso:22095:ed-1:v1:en:term:3.5.9>

Post-Industrial PMMA scraps are easy to track with a clear *CHAIN OF CUSTODY*. It is possible to know the origin of each material. It is also essential to guarantee that the “Virgin” material, and its monomer, has been REACH registered. This is more challenging for post-consumer materials; in part because the PMMA parts can come from rather old materials (marketed before the implementation of the REACH regulation) – (for example tail-lights of cars (average age 17 years, construction materials >> 20 years) and, in part because the PMMA parts can have been included in finished products made outside of Europe (e.g. flat screens).

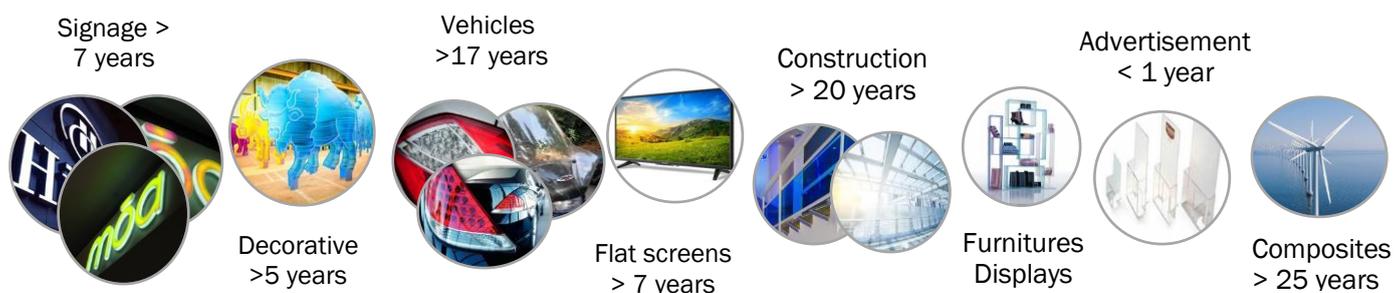

There are several possible chains of custody. PMMA depolymerization and purification is done in dedicated units, so it allows to use the **Identity preserved** model of the regenerated MMA. It means that the claim of 100 % “recycled content” is based on physical product. The user of the regenerated MMA could eventually use also virgin MMA, and in its plant have both productions with pure virgin or pure regenerated MMA, and use the **Segregated** model. The user can also decide to use a constant mix of virgin and regenerated MMA, and use the **Controlled Blending** model. But some customer might be ready to pay a premium to capture all the regenerated MMA in their claims even though the products are made with uncontrolled mix of virgin and regenerated MMA. In this case, the **Mass Balance** model can become appropriate. In this model, the amount of regenerated MMA is audited by approved stakeholders, and not more regenerated MMA claims can be sold than what has been effectively produced. The last possible model is the **Book and Claim** model. In this model, the regenerated MMA produced in one site is recorded, but the physical flow is disconnected from the supply chain, meaning that a consumer buys separately the “recycled credits” and the monomer.

The MMAtwo process allows all types of chain of custody, but has the major advantage to allow the “**Identity Preserved**” mode, and to ensure that the regenerated MMA returns in the economy in the very same application.

PMMA feedstock is not restricted to wastes

The PMMA feedstock that can be used in the MMAtwo recycling process is very diverse. Post Industrial scraps have been treated, such as Cast clear PMMA, extrusion and injection grades, colored, but also white and black products, mixed cast and extrusion coloured sheets... So far, no limits to the technology have been found.

Recycling Rate versus Recycled Content.

The recycling rate is important, and with MMAtwo technology we have already communicated in a previous newsletter that it can be between 65 and 85 wt % (regenerated MMA to PMMA waste) at a purity above 99 wt %. However, for customers what can be more important is the “Recycled Content”, which mean the amount or regenerated MMA which is used in the product. With high purity regenerated MMA, such as the product achievable with MMAtwo’s technology, it is not necessary to dilute the regenerated MMA with virgin MMA to achieve the highest technical properties. So, both a high Recycling rate and a high Recycled content are achievable.

Impact from substances of concern and additives, “Legacy additives”

The additives used in PMMA include: Pigments, Fillers, mold releasing agents, chain transfer agents, plasticizers,... For some other polymers, like PVC or Polystyrene, the additives that were used but no longer allowed on the market are restraining the use of mechanical recycling, since they would still be present in marketed products. When using a depolymerization process, like in MMAtwo, the monomer can be purified to virgin-like purity. However, it is important to guarantee that all the additives are properly sorted, decomposed and disposed in appropriate conditions. This is the next

major challenge for MMAtwo, which aims to identify the additives that were used in the past, and to demonstrate where they end-up in the depolymerization process, and guarantee their fate, like the Pb, Cd, Se, pigments that were once used.

MMAtwo 3 major objectives:

- Construct a **new PMMA depolymerization value chain in Europe**, covering the whole value chain of the PMMA lifecycle with both production waste and end of life waste
- Avoid down-cycling through **reactive regeneration** (depolymerization)
- Develop an **innovative metal-free technology** enabling depolymerization of lower quality waste.



MMAtwo is divided into 7 Topics (so called Work Packages)

- WP1:** Collection of scraps and pretreatment,
- WP2:** Depolymerization,
- WP3:** Purification,
- WP4:** Exploitation, end-users tests, business analysis,
- WP5:** Techno-economic and environmental assessment,
- WP6:** Project management and
- WP7:** Communication, dissemination and academic outreach.

Main results achieved since January 2021


WP1 – Collection of scraps and pretreatment

Heathland, in collaboration with **Comet Traitements**, **Ecologic**, **Arkema** and **Delta Glass**, collected PMMA waste for conversion into pre-treated materials ready to be depolymerized in the MMAtwo pilot installation. There were 5 campaigns in which different types of PMMA waste were tested and each type of waste required a specific type of treatment at **Heathland**. There was a specific focus on collection and treatment of post-consumer (End-of-Life) PMMA waste streams and certain heavily contaminated PMMA waste streams, which, despite the contaminants, were still converted into usable material. Particularly there were successes in separating PMMA from PVC waste. **Certech** and **Heathland** worked on new analysis techniques and guidelines aiding in the collection and subsequent processing of PMMA. **Ecologic** and **Heathland** made a model for predicting tonnages of PMMA waste until 2030 from WEEE and **Heathland** identified additional tonnage to serve as feedstock for depolymerization.




WP2 - Depolymerization

Heathland, JSWE, PDC, Suster and Arkema have conducted 4 pilot test campaigns, by June 2021. During the June 2021 campaign very long pilot tests have been made. The goal was to demonstrate that the pilot plant can operate stably over long periods. During that week, injection clear, extrusion clear, white cast (for bathroom applications), black cast PMMA have been tested successfully. Several 100 kgs of crude MMA were supplied to Speichim for purification.

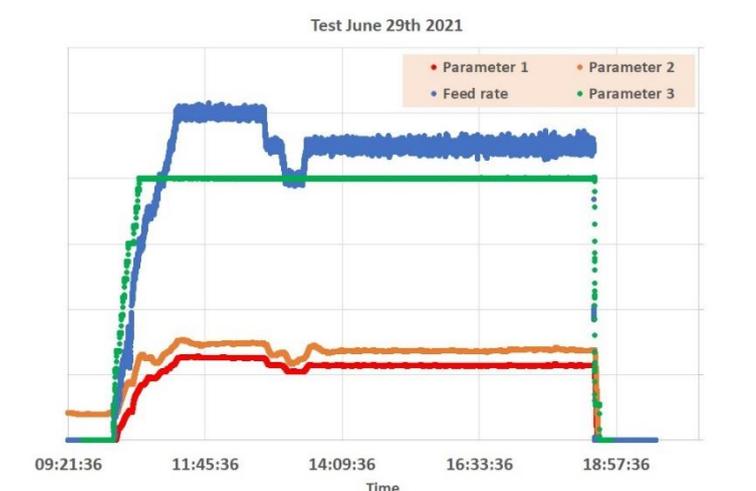

The IPScore[®] tool developed by the European Patent Office to analyze the value of patents has been used to compare the IP portfolio of stakeholders. The value of IP was analyzed both from the perspective of the technology developers and from the regenerated MMA producer. Quite often the rMMA producer also produces PMMA sheets from it, but does not have multiple products on its portfolio. Concerning the technology developers, it can also be a large PMMA producer, as well as a start-up or small company, or like Japan Steel Works a company which has many other equipment which can be used in other fields. The impact for the respective companies is therefore different and is also reflected by the size of the balls, and the position in the Risk-Opportunity Matrix. The figure also illustrates the multiple technologies which have been patented for PMMA depolymerization, with some patents which are now in the public domain, and others which have been filed more recently.

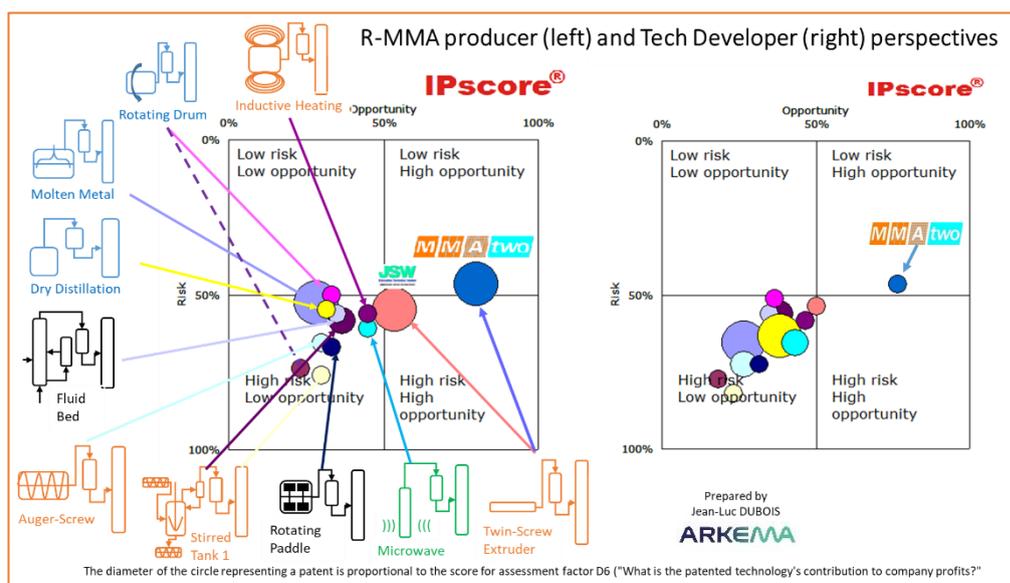


The impact for the respective companies is therefore different and is also reflected by the size of the balls, and the position in the Risk-Opportunity Matrix. The figure also illustrates the multiple technologies which have been patented for PMMA depolymerization, with some patents which are now in the public domain, and others which have been filed more recently.

The IPScore[®] tool is based on several sets of questions, with multiple choices, on the patent itself, policy of the owner, market size and potential... This part of the work is still on-going as data are being collected on other recent technologies which could be applied to recycle PMMA.

WP3 – Purification

Speichim supplied to Certech several samples of purified regenerated methyl methacrylate monomers (obtained from various PMMA streams) in order to determine odour concentration by dynamic olfactometry (see graph). It follows that while regenerated MMA 4 shows practically the same odour concentration as virgin MMA 4, the rMMA 2 and rMMA 3 were significantly higher by more than a two-fold values, which is significant. Correlating with GC-MS/FID data suggests that these high values are linked to ethyl acrylate (EA) concentration and not to methyl isobutyrate (MIB), two typical contaminants. The (odorous) detection threshold of EA was determined in a separate dynamic olfactometry experiment, together with that of MIB and MMA, and these values support the interpretation given above. Indeed, EA detection threshold is very low at $0.08 \mu\text{g}/\text{m}^3$ while other substances have higher values: $22.03 \mu\text{g}/\text{m}^3$ for MMA and $16.10 \mu\text{g}/\text{m}^3$ for MIB.

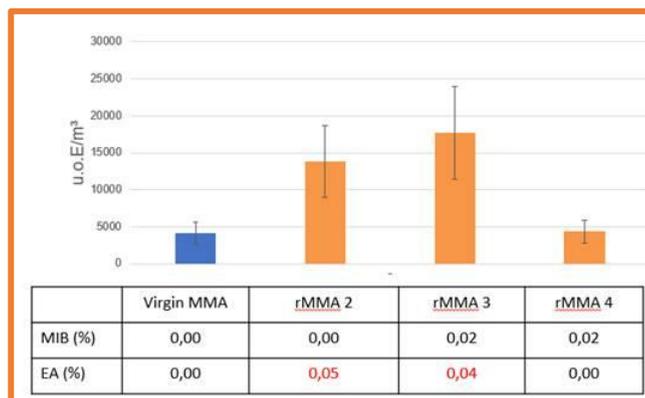

© Certech

WP4 – Exploitation, End-user tests, Business analysis

Delta Glass is sponsoring Solar Team, an initiative from the University of Technology Eindhoven. This project has designed Stella Vita (see pictures below), a sustainable mobile home powered by solar cells on roof top, for which Delta Glass is supplying PMMA side windows made from rMMA.




Stella Vita mobile home (University of Technology Eindhoven www.solarteameindhoven.nl)

Arkema evaluated several rMMAs samples from the latest pilot campaigns for windmill blade composite formulations (see picture below). All the composites prepared by infusion of glass fiber fabrics were shown to deliver mechanical properties identical to those based on virgin MMA.



Left: Composite specimens after polymerization Right: windmill blade end application ©Arkema, photograph Anthoine Fyot


WP5 – Techno-economic and environmental assessment,

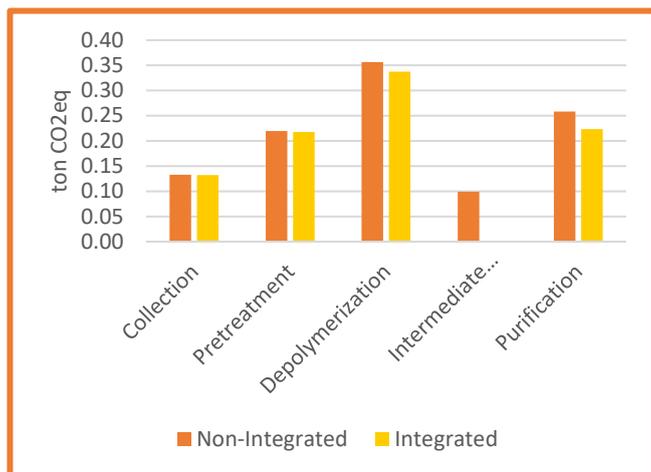

- The integrated process configuration (where the depolymerization and the purification are done on the same site) has 15% lower carbon footprint compared to the non-integrated configuration (where the crude MMA has to be transported)
- The difference in environmental performance is due to the avoidance of intermediate product transportation and to the heat optimization

© Quantis

- Compared to virgin production, there is a large impact reduction for MMAtwo (more than 75% carbon footprint) depending on the technology
- Compared to other recycling technologies, the impact reduction ranges between 20% to 60% carbon footprint

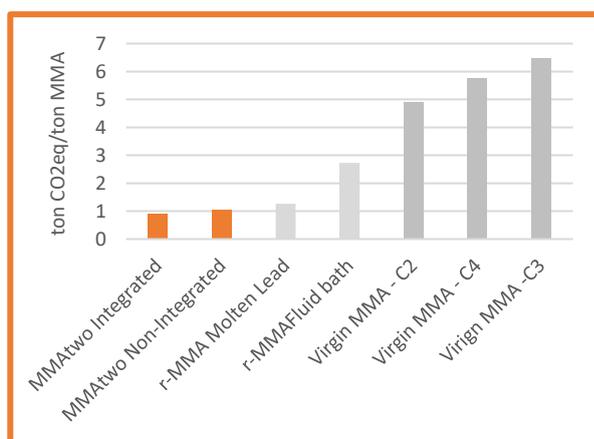

© Quantis

Other depolymerization technologies will be added in the future

MMAtwo Main events



Are you interested to contribute to the MMAtwo project or do you simply want to stay informed about all our news?

Please let us know by completing the following form

www.mmatwo.eu/contact/

MEET US THERE

- Plastic Recycling Technology, Vienna, October 19th and 20th 2021, Jean-Luc Dubois, presents the MMAtwo project.
- Next MMAtwo Workshop, May 2022
- Chemical Recycling, Cologne, June 2022

A word from ...

Helene Wiesinger, Researcher at ETHZ, Chair of Ecological Systems Design, new member of the advisory board

“To combat climate change and excessive resource use it is crucial that we learn how to make use of old materials. Be it by reusing (e.g. second-hand furniture and clothes) or by recycling (e.g. glass, metals, or some plastic products). To achieve this challenge new technologies are urgently needed, as full recyclability of many plastics remains difficult to achieve. MMAtwo is pushing for this for PMMA. I am very excited to newly be part of the process as a member of the advisory board. I am a researcher at ETH Zürich and myself involved in a project on recycling plastics (the Clean Cycle Project). In our team, we have been trying to better understand plastic additives and other impurities and their role in recycling. While there are still many open questions, I hope that we can contribute to a better understanding of how plastic additives may influence the depolymerization of PMMA and give some insights into where these substances might end up. A better understanding will hopefully help to (re)create clean starting material from waste without posing a risk




Sara Babo, Conservation scientist and Conservator-restorer of contemporary art

My recent research has been focusing on the preservation of artworks made with PMMA, which implied the characterization of acrylic sheets from the 1960s and 2000s, with different colorants, additives, and MMAs (virgin and recycled). In the conservation field, understanding the detailed material composition of an object is important to predict its long-term stability and develop preservation strategies. Surprisingly, this research could also provide interesting information for the MMAtwo project in what concerns the composition of historical PMMAs.

I have studied nacreous PMMA sheets used in the sculptures of the Portuguese artist Ângelo de Sousa (image at the right), that were produced originally for the button and cutlery industry. In all the samples from the 1960s, independent of its colour, synthetic plumbonacrite (a basic lead carbonate) was identified as the effect pigment responsible for the nacreous brilliance, while in more recent samples (2000s) the effect pigment identified was bismuth oxychloride. This alteration reflects the industry concerns regarding the toxicity of lead-based materials. For another case-study, red PMMA samples from the 1960s and 2000s were analysed; in both, cadmium sulfoselenide (cadmium red) was identified.

Awareness of the possible presence of lead and cadmium in the PMMA waste available as feedstock for depolymerisation has led the MMAtwo project to search for strategies to identify and safely eliminate these toxic heavy metals. I am looking forward to following the developments of the MMAtwo project!

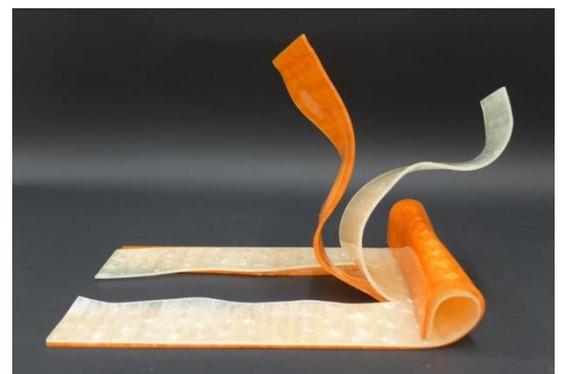

Ângelo de Sousa, untitled sculpture, 1965-1967, artist collection, 29 x 47 x 25 cm. Photo by S. Babo.